




# STAR 8 / STAR 10

## VERTICAL MASTS

### TECHNICAL DATA

	STAR 8	STAR 10
Working height	8.7 m	10 m
Platform height	6.7 m	8 m
Horizontal outreach	3 m	3 m
Lift capacity	200 kg	200 kg
Platform size	0.78 x 0,98 m	0.78 x 0,98 m
<b>D</b> Length	2.7 m	2.7 m
<b>B</b> Width	1 m	1 m
<b>A</b> Height - stowed	1.99 m	1.99 m
Tailswing	0 cm	0 cm
<b>C</b> Wheelbase	1.2 m	1.2 m
<b>E</b> Ground clearance	10 cm	10 cm
Driveable at full height up to	6.7 m	8 m
Drive speed proportional	0.6 - 5 km/h	0.6 - 5 km/h
Turning radius - outside	1.88 m	1.88 m
Turntable rotation	345°	345°
Vertical jib rotation	130° (+70°/-60°)	130° (+70°/-60°)
Tires - non marking	16x5x10.5	16x5x10.5
Tilt alarm	3°	3°
Gradeability	25 %	25 %
Hydraulic system capacity	7 l	7 l
Power source	24 V - 250 Ah	24 V - 250 Ah
Weight	2 585 kg	2 677 kg

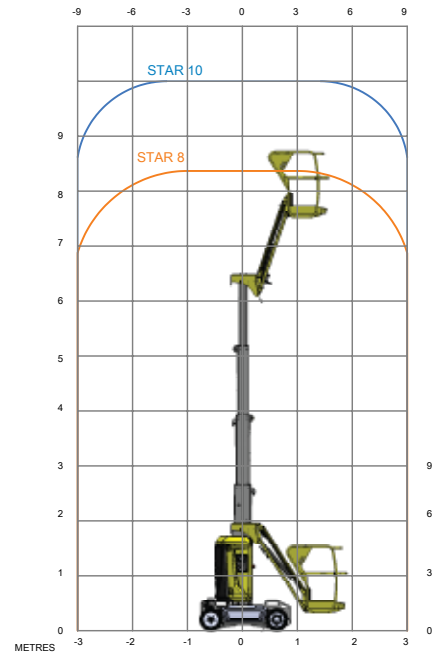

### STANDARD EQUIPMENT

- ③ 24 V electric drive brushless AC motors
- ③ 24 V - 250 Ah traction batteries
- ③ 35 A battery charger
- ③ Battery charge indicator
- ③ On-board diagnostic tool Haulotte Activ'Screen
- ③ Centralised battery filling
- ③ Forklift tine pockets
- ③ Towing hooks and lifting eyes
- ③ Passive potholes
- ③ 2 rear steering wheels
- ③ 2 front driving wheels
- ③ Non-marking tires
- ③ Brake release
- ③ Hourmeter
- ③ Horn
- ③ Emergency stop buttons at cage and ground level
- ③ Load controller in the platform
- ③ Emergency hand pump
- ③ 2 control stations at cage and ground level
- ③ 2 rings in the platform for safety harnesses
- ③ Travel alarm

### OPTIONS ET ACCESSORIES

- ③ Maintenance-free batteries
- ③ Swing door entry gate
- ③ Haulotte ACTIV'SHIELD™ Bar
- ③ Flashing light
- ③ Working light
- ③ Power line in platform
- ③ Air line in platform
- ③ Hydraulic oil for cold countries
- ③ Biodegradable oil

